

Continuous Ink Supply System

for

EPSON R285

Installation Instruction

For ST Prefilled Version

This Version of the Continuous Ink Flow System comes with Prefilled Cartridges and Auto Reset Chips. You just need to fill the Reservoir bottles and print! The whole operation is very easy. It's really an effective tool to save your money.

CIS for Epson R285 Instruction

Thank you for purchasing ST Continuous Ink Supply System. We appreciate your support and will try our best to make your experience with our products a pleasant one. Printing has (turned into) a different experience ever since you installed ST Continuous Ink Supply system on your own printer. Just imagine being able to print without the hassle of constant refills for those expensive cartridges.

Please take your time installing ST Continuous Ink Supply system. Do not remove your original cartridges until you have the ST CIS system primed and ready to install (to prevent the drying of heads). In addition, make sure you had perfect nozzle checks before installing the ST CIS system. The ST CIS system might not work properly if the nozzles are clogged.

Most users can get a perfect nozzle check for the first time after installing the ST Continuous Ink Supply system; If not, the users might need to run two or three cleaning cycles or let the printer sit for awhile before they can get the perfect results.

Please enjoy using the continue Ink Supply System for your benefits of reducing the printing cost. Also, reading over the instructions beforehand will allow you to find rich functions of using this system to make you use this system easily, safely and stably.

1. General Guide

1. Components

- | | | | | | |
|-----------------------|------|-------------------|------|----------------|------|
| a. CIS System | 1set | b. Air Filters | 6pcs | c. Support Arm | 1set |
| d. Standby Refill Kit | 6pcs | e. Instruction CD | 1pc | | |



2. Opening box inspection

- Check if all the accessories are ready before installing.
- Check if the leakage of the CISS has occurred.
- Check if the tubes have been separated from the CISS,

2. Printer Testing

- 1) Check whether the printer is in normal condition, like mechanical status, lubrication status etc.
- 2) Print testing lines to ensure the printing head is in good condition.
- 3) Print pictures to see whether the printing image is good or not.

3. Installation Procedures

Step 1: Preparation



Put the CISS on the right side of the printer. and place all the tubes at correct position.



Pull out the small rubber plug from the air hole as picture shown above.



Place an air filter into each air hole. (6pcs for 6 air holes total)

Step 2: Take out the original cartridges



Press the ink-changing button



pulling out the power line of the printer and move the cartridge bar to the cartridge-changing side.



Step 3: Remove the cartridge cover



The cartridges will be taken out once the clip out.



Inserting the above screwdriver into the the gap and prize it slowly as picture shown. Don't prize it overexert.



Take off the Clip.



Take off the cartridge directly



Take out the original cartridge



Get ready for putting in the new CISS

Step 4: Install Cartridge



Move the cartridge-bar to the left side



Move the cartridge thru the printer cover
As above shown



Move the cartridge-bar back to the original
position



Put in the cartridge of CISS according to
the color mark and lock the cartridge.




Lock the cartridges tightly




A sound "Da" will be heard when the clip
Has Locked the cartridge completely


Step 5: Fix the Support Arm and Tube line

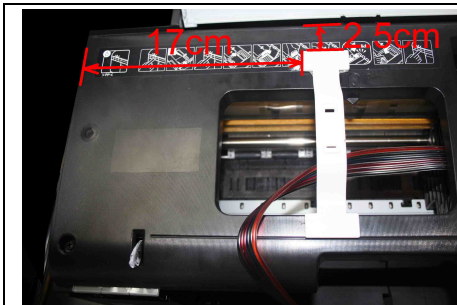


Fit the support arm like the picture shows.
(6cm of distance from the left and 2.2cm
From the top)

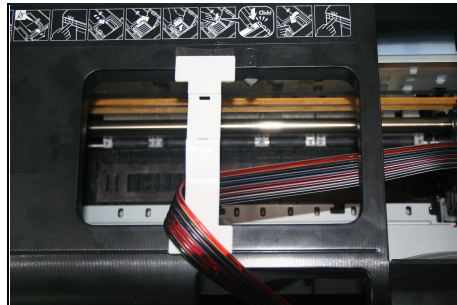

Fix the balance arm on the support arm.

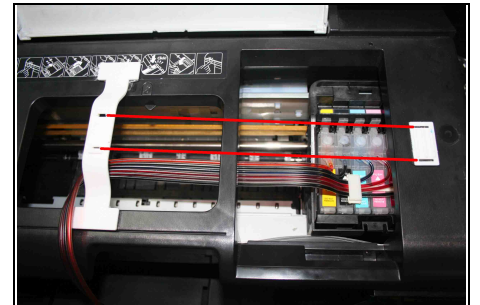


Stick the clips on the right of the printer to
make the tubes passing through support
arm and clip on the same level with printer.

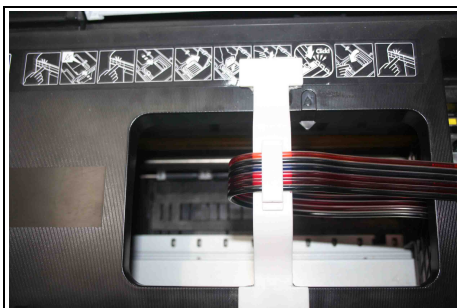

Put the tubes thru the support arm.




Place the tubes orderly into the small clips
And clips them well

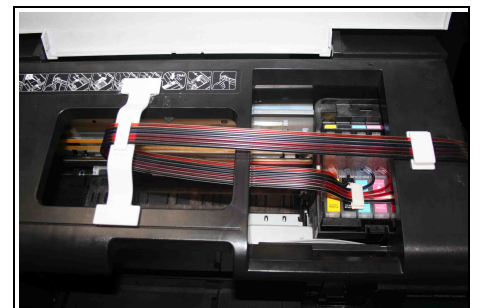


Finish the installation.


Step 6: Adjust Tube Line

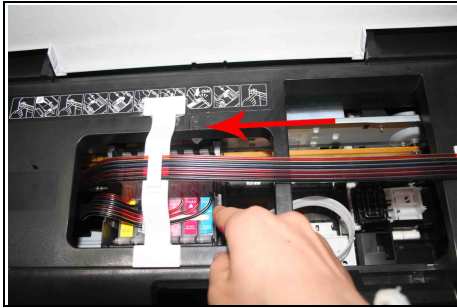


Adjust the tubing length and move the Cartridge-bar. Insure there's plenty length of tubes to make the cartridge-bar can thoroughly move to the left side.

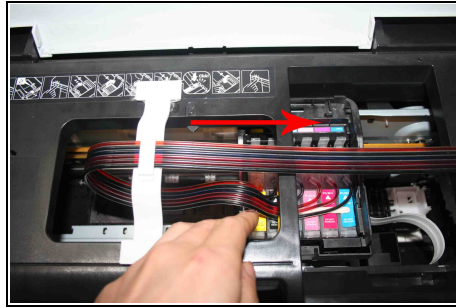


Simulating the movement of cartridge-bar. Make sure that tubes have kept away from the cartridge-bar without blocking its movement (or causing any dysfunction) during its operation

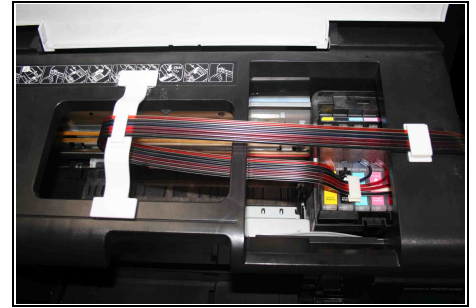


Adjustment is finished.

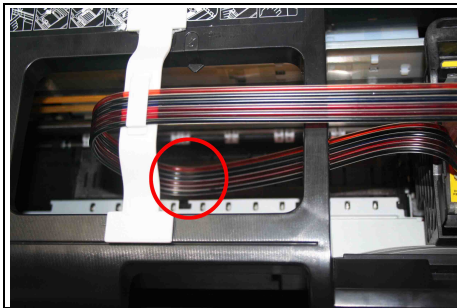

Too long

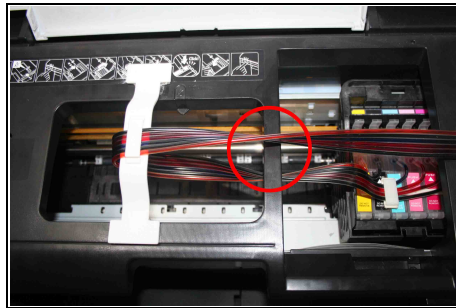

Twist

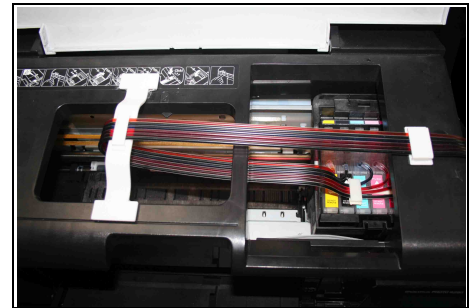

Perfect

Step 7:



Connect the power cord.




Turn on the power and check whether the Printer can work well.



Open the upper cover of the printer, and there is a little hole in the bottom left corner will be found. Pls block it with a small piece of paper. Then this printer can work with the upper cover open.

Step 8: Check the nozzle

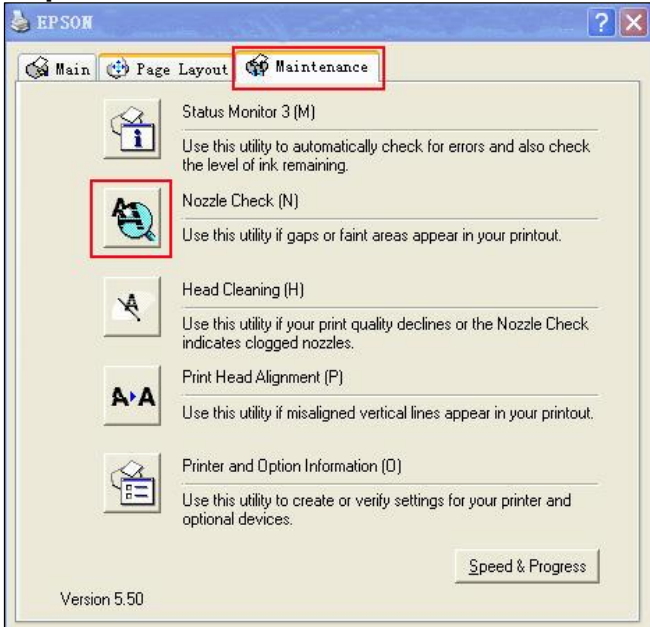

Enter Checking Nozzle Panel



Print test lines. If it is OK, then you can begin using.



If there is broken lines, then pls clean the printer head.

Broken lines may be caused by the air entering the nozzles. If there are still some broken lines after cleaning printer head repeatedly, especially for single color, then you can leave the printer standing by for about 1 hour. Then, the broken lines may disappear. If the problem still occurs, please contact your local dealer.

4. Chip Reset



If ink-lacking light of the printer is flashing, it is aimed to remind you to change the cartridges. Press the ink-changing knob continually as above picture shows.



Stop pressing when the cartridge-bar is in the ink-changing position. Take out the cartridges and then install it again. Chip reset successfully.

5. Refill Ink



Please note the ink level in the reservoirs; if the ink level is below 1CM as the picture shown above, please use refill kits to fill ink into Reservoir bottles. Carefully pull out the rubber plugs from the ink refill holes (There is possibility of ink spattering. Pls be careful.) Refill ink according to the colors. Then re-cap the rubber. (**Please keep the printer and the reservoir bottles at the same horizontal line during the process of refilling ink.**)

6. Attention for Maintenance:

Take out the CISS including the inner cartridges and other components. Then remove support arm from printer, and re-install original cartridges. Please inquire local dealer before sending to maintenance.

7. Notice:

1. Please don't take out cartridge at random after installing the CIS system. Keep the reservoir bottles on the same level with the printer.
2. Try to keep at least 1/2 inch of ink in the bottles.
3. Don't place the Reservoir Bottles too much higher or lower than the printer.
4. Suggested using in a dry place between 15 and 35 degree. Avoid exposure to direct sunlight.
5. Don't reverse or lean the continuous ink supply systems during shipping. Please make sure all the ink filling holes and ventilation holes are closed tightly during transportation. Otherwise, the ink may leak.
6. Don't sway the cartridge frequently. It may cause ink leakage.
7. Don't pull out the connector of cartridge and don't tear off adhesive tape at the bottom of cartridge.

8. Warning:

1. Not drinkable; keep it out reach of children.
2. Avoid exposure to direct sunshine and don't keep it in high or freezing temperature.
3. Avoid collision and fallen down.